






STUB TIP CO	Visina H (m)	Prečnik na vrhu D (mm)	Prečnik u osnovi D1 (mm)	Osnova temeljne ploče T-T1 (mm)	Debljina temeljne ploče t (mm)
CO 3.8/3	3.80	60	105	250-200	12
CO 4.8/3	4.80	60	105	250-200	12
CO 5.8/3	5.80	60	120	300-250	12
CO 6.8/3	6.80	60	136	300-250	16
CO 7.8/3	7.80	60	136	300-250	16
CO 8.8/3	8.80	60	155	300-250	18
CO 9.8/3	9.80	60	155	300-250	18
CO 10.8/4	10.80	60	173	350-300	20
CO 11.8/4	11.80	60	173	350-300	20

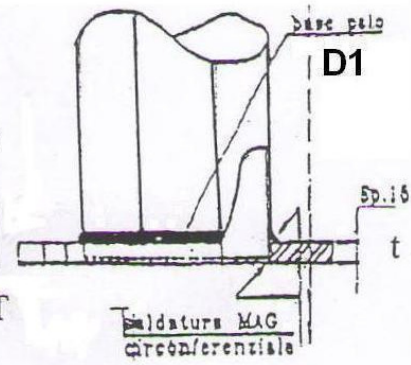

lavorazioni
base palo

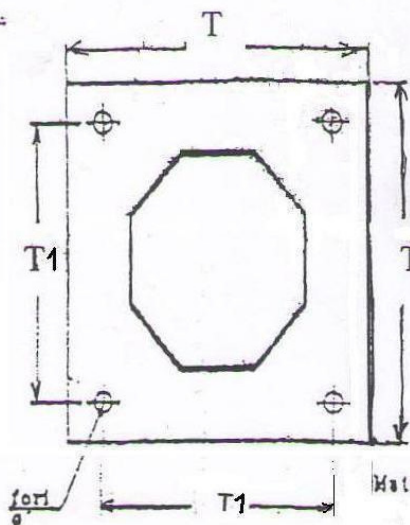

Totale N°	
Piastre	130

Material: S275JR (Fe430B)

Treatment: - piastra (e palo) ZINCATURA A CALDO

piastre di base
T x T x t

Dis. MD.	Material S235JR <Fe 360>	ČELIČNI POCINČANI RASVJETNI OSMOUGAONI STUBOVI TIP CO
Data 04/03/09	CON CO	
	N.C.M. 20020 MAGNAGO (MI)	CONRAM d.o.o. Brčko-G.Rahić